

Annual Air Quality Report 2021

Aeron Arlin Genet, Air Pollution Control Officer

♀ 260 N. San Antonio Rd., Ste. A Santa Barbara, CA 93110 🏻 🌐 ourair.org

(805) 979-8050

🔰 🔯 @OurAirSBC

TABLE OF CONTENTS

1	2021 Air Quality Summary	. 1
2	Ambient Air Quality Standards and Air Monitoring Stations	. 3
3	Gaseous Pollutant Summary	. 6
4	Particulate Matter Summary	. 8
5	Air Quality Trends	10
Appen	dix A – Ambient Air Quality Standards Table	41

SANTA BARBARA COUNTY AIR POLLUTION CONTROL DISTRICT BOARD OF DIRECTORS

Supervisor Das Williams

First District Santa Barbara County Board of Supervisors

Supervisor Gregg Hart Second District Santa Barbara County Board of Supervisors

Supervisor Joan Hartmann, Chair Third District Santa Barbara County Board of Supervisors

Supervisor Bob Nelson Fourth District Santa Barbara County Board of Supervisors

Supervisor Steve Lavagnino Fifth District Santa Barbara County Board of Supervisors Mayor Holly Sierra Alternate – n/a City of Buellton

Vice Mayor Al Clark Alternate – Mayor Wade Nomura *City of Carpinteria*

Mayor Paula Perotte Alternate – Mayor Pro Tem Stuart Kasdin *City of Goleta*

Mayor Ariston Julian Alternate – Mayor Pro Tem Tony Ramirez *City of Guadalupe*

Mayor Jenelle Osborne Alternate – Councilmember Gilda Cordova *City of Lompoc*

Mayor Randy Rowse Alternate – Councilmember Eric Friedman *City of Santa Barbara*

Mayor Alice Patino, Vice-Chair Alternate – Councilmember Etta Waterfield *City of Santa Maria*

Mayor Pro Tem Mark Infanti Alternate – Mayor Charlie Uhrig *City of Solvang*

1 2021 AIR QUALITY SUMMARY

This annual report provides information on the measured air quality concentrations in Santa Barbara County for 2021, as well as information on air quality trends. The report is available for download at the District website, <u>www.ourair.org/air-monitoring</u>.

- This section provides a summary of the air quality in 2021.
- Air quality standards and monitoring station locations are discussed in Section 2.
- Detailed air quality data for 2021 are provided in Section 3 for gaseous pollutants, and Section 4 for particulate matter.
- Section 5 includes a discussion of air quality trends.

In 2021, California experienced numerous wildfires and extended periods of high temperatures – both of which can result in increased air pollution. Even though California had nearly 10,000 fires that burned a record-setting 4.4 million acres in 2021, air quality in Santa Barbara County was much better in 2021 than the prior year. Smoke from the 2020 fires created conditions where Santa Barbara County's air quality became unhealthy for several days of the year. In 2021, however, the state 24-hour PM10 standard of 50 μ g/m³ was only exceeded on October 11, 2021 at three different stations: Las Flores Canyon, Lompoc H Street, and Santa Barbara. It should be noted that the Santa Maria station was relocated during 2021 and only collected air quality samples during the first quarter; if this station had been sampling during the rest of the year, there would have likely recorded more exceedances of the particulate matter standards. There was only one exceedance countywide of the state and federal 8-hour ozone standard of 70 ppb at the Paradise Road station on June 17, 2021. The state ambient air quality standards were met for all other air pollutants in 2021. Table 1-1 presents a summary of the number of exceedances for each monitoring station in Santa Barbara County. A tabular summary of the

Number of Days that Exceeded Air Quality Standard									
Station	O ₃ -1hr (state)	O ₃ -8hr (state)	O ₃ -8hr (federal)	NO2	SO ₂	со	PM ₁₀ (state)	PM ₁₀ (federal)	PM _{2.5} (federal)
Carpinteria	0	0	0	0	-	-	-	-	-
Goleta	0	0	0	-	-	-	0	0	0
Las Flores Canyon	0	0	0	0	0	0	1	0	-
Lompoc H Street	0	0	0	0	0	0	1	0	0
Lompoc North	0	0	0	0	0	-	-	-	-
Paradise	0	1	1	0	-	-	-	-	-
Santa Barbara	0	0	0	-	-	-	1		0
Santa Maria ²	0	0	0	0	-	0	0	0	0
Santa Ynez	0	0	0	-	-	-	-	-	-
Countywide Total	0	1	1	0	0	0	1	0	0

TABLE 1-1: SANTA BARBARA COUNTY EXCEEDANCE SUMMARY FOR 2021¹

¹A dash indicates that the pollutant is not measured at this location.

²Sampled Q1 only.

2 AMBIENT AIR QUALITY STANDARDS AND AIR MONITORING STATIONS

Ambient Air Quality Standards

The Federal Clean Air Act (CAA) (Title 1, Section 109) requires the Environmental Protection Agency (EPA) to prescribe primary national ambient air quality standards (NAAQS) for certain air pollutants where public health criteria have been established. These pollutant levels were chosen to protect the health of the most susceptible individuals in a population, including children, the elderly, and those with chronic respiratory ailments. A secondary standard is also prescribed to protect human welfare (visibility, crop damage, building damage). These pollutants are known as criteria pollutants.

The EPA currently has NAAQS for six criteria pollutants: ozone (O_3) , nitrogen dioxide (NO_2) , carbon monoxide (CO), sulfur dioxide (SO_2) , lead (Pb), particulate matter less than ten microns in diameter (PM_{10}) and fine particulate matter less than 2.5 microns in diameter $(PM_{2.5})$.

In addition to the EPA standards, the California Air Resources Board (CARB) has set air quality standards for the same federal criteria pollutants as well as four others: sulfates, hydrogen sulfide (H₂S), vinyl chloride (chloroethene, C₂H₃Cl), and visibility-reducing particles.

A list of the federal and state standards applicable in 2021 can be found in Appendix A. During 2021, there were no changes to federal or state or ambient air quality standards.

Air Monitoring Stations

In 2021, there were 12 monitoring stations operating in Santa Barbara County measuring ambient air and meteorological conditions. Two of the stations measured odors from industrial facilities. Eight were operated by the District. The remaining stations were operated by CARB and private industry. The monitoring stations are divided into two categories: State and Local Air Monitoring Stations (SLAMS) and Industrial monitoring stations. The SLAMS stations are designed to monitor the air in the urban areas of the county, while the Industrial stations are required by facility permits to monitor air quality impacts from the operation of these facilities. While Industrial stations are typically not compared to air quality standards, three in our network have their ozone monitors designated as SLAMS and are compared to the NAAQS. Figure 2-1 shows the locations of all monitoring stations in Santa Barbara County during 2021, the pollutants and parameters measured at each station, and their designations.

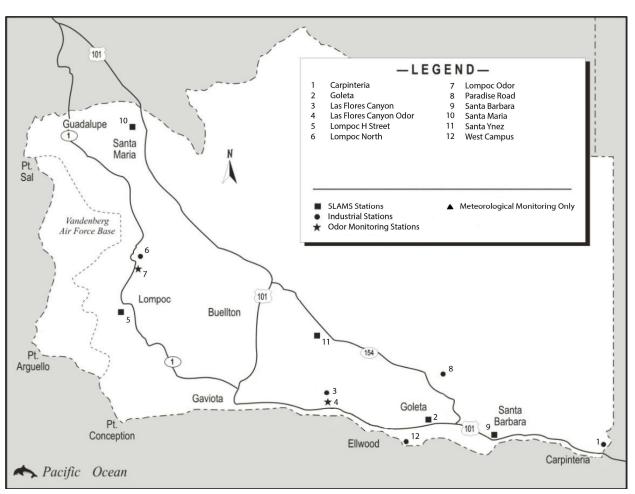


FIGURE 2-1: 2021 SANTA BARBARA COUNTY AIR MONITORING STATIONS

Station	O ₃	NO ₂	SO ₂	СО	тнс	H ₂ S	TRS	PM ₁₀	PM _{2.5}	WS	WD	ATM
Carpinteria	Х	Х								Х	Х	Х
Goleta	Х							Х	Х	Х	Х	Х
Las Flores Canyon	Х	Х	Х	Х	Х			Х		Х	Х	Х
Las Flores Canyon Odor						Х				Х	Х	Х
Lompoc H Street	Х	Х	Х	Х				Х	Х	Х	Х	Х
Lompoc North	Х	Х	Х		Х					X	Х	Х
Lompoc Odor						Х	Х			Х	Х	Х
Paradise Road	Х	Х								X	Х	Х
Santa Barbara	Х							Х	Х	Х	Х	Х
Santa Maria*	Х	Х		Х				Х	Х	Х	Х	Х
Santa Ynez	Х											
West Campus			Х		Х	Х	Х			X	Х	
SLAM	1S Monitors							Nor	n-NAAQS	Monite	ors	
*	Q1 Only			THC				Total Hydrocarbons				
WS	Wind Speed				TRS				Total Reduced Sulfur			
WD	Wind Direction			ATM				Ambient Temperature				

TABLE 2-1: MONITORING STATION PARAMETER LIST FOR 2021

Monitoring Station Changes During 2021

The Santa Maria monitoring station did not meet siting criteria and ceased operation in the first quarter while the station was relocated. The station did not return to operation in 2021. During this time, the APCD deployed portable air monitoring devices in Santa Maria to measure PM_{10} and $PM_{2.5}$ and presented this information on the agency's website.

Ongoing Changes From 2018

The permit holders responsible for the operation of the Las Flores Canyon Odor site have received District approval to temporarily shut down the site while production at the associated processing plant is not in operation. The site was temporarily shut down in July 2018 and will be re-started when production at the associated processing plant resumes.

3 GASEOUS POLLUTANT SUMMARY

Gaseous air quality analyzers are operated in climate-controlled monitoring stations located throughout the county. These analyzers measure air quality 24 hours a day, except when they go through a nightly testing routine where they are challenged with known concentrations of calibration gas to ensure data precision and accuracy. They collect real-time measurements that are used to calculate 1-hour and 8-hour concentrations, as applicable, for comparison to air quality standards. Ozone was measured at nine stations throughout the county during 2021, NO₂ was measured at six stations, SO₂ was measured at four stations, and CO was measured at three stations. Section 2 of this report provides additional information on the monitoring network.

A summary of the highest gaseous pollutant values measured in Santa Barbara County during 2021 is provided in Tables 3-1 through 3-5. The tables show the four highest concentrations for each pollutant in 2021 and the dates they occurred.

O ₃ 1-hour (ppb)												
Station	1st	Date	Time	2nd	Date	Time	3rd	Date	Time	4th	Date	Time
Paradise	82	6/17/2021	14:00	77	9/9/2021	12:00	74	6/30/2021	15:00	70	6/16/2021	19:00
Santa Ynez	76	9/9/2021	13:00	69	6/17/2021	12:00	69	10/3/2021	15:00	68	7/9/2021	15:00
Las Flores Canyon	73	10/3/2021	12:00	71	10/2/2021	16:00	68	10/1/2021	19:00	68	10/4/2021	13:00
Santa Barbara	69	10/4/2021	13:00	68	10/1/2021	16:00	64	9/20/2021	17:00	64	10/3/2021	15:00
Goleta	63	10/1/2021	15:00	63	10/4/2021	13:00	61	9/20/2021	15:00	61	10/3/2021	12:00
Lompoc North	62	10/3/2021	20:00	61	10/16/2021	19:00	61	10/4/2021	10:00	58	9/30/2021	21:00
Carpinteria	56	2/24/2021	15:00	56	3/31/2021	16:00	56	4/1/2021	12:00	56	10/3/2021	12:00
Santa Maria ²	51	1/15/2021	23:00	50	1/18/2021	16:00	46	1/28/2021	7:00	45	1/13/2021	19:00
Lompoc H Street	40	10/16/2021	13:00	34	10/15/2021	15:00	33	9/30/2021	13:00	29	10/12/2021	10:00

TABLE 3-1: FOUR HIGHEST 1-HOUR O₃ CONCENTRATIONS FOR 2021¹

¹ State Standard = 0.09 ppm (95 ppb)

² Sampled Q1 only

O ₃ 8-hour (ppb)												
Station	1st	Date	Time	2nd	Date	Time	3rd	Date	Time	4th	Date	Time
Paradise	71	6/17/2021	9:00	67	9/9/2021	10:00	65	10/3/2021	11:00	62	6/16/2021	10:00
Las Flores Canyon	67	10/3/2021	12:00	64	10/2/2021	16:00	62	4/1/2021	18:00	62	10/1/2021	12:00
Santa Ynez	61	6/17/2021	9:00	61	10/3/2021	10:00	60	10/2/2021	10:00	57	4/1/2021	10:00
Santa Barbara	60	10/4/2021	9:00	56	4/1/2021	10:00	56	4/2/2021	10:00	55	9/20/2021	11:00
Lompoc North	59	10/16/2021	13:00	58	10/3/2021	20:00	57	10/4/2021	7:00	55	10/2/2021	23:00
Goleta	55	10/16/2021	10:00	54	4/1/2021	9:00	54	10/3/2021	10:00	53	10/4/2021	8:00
Carpinteria	52	4/1/2021	9:00	50	3/31/2021	11:00	47	4/2/2021	10:00	45	4/18/2021	8:00
Santa Maria ²	48	1/15/2021	22:00	47	1/18/2021	14:00	45	1/28/2021	12:00	43	1/13/2021	16:00
Lompoc H Street	35	10/16/2021	10:00	31	10/15/2021	10:00	29	9/30/2021	11:00	25	9/17/2021	10:00

TABLE 3-2: FOUR HIGHEST 8-HOUR O₃ CONCENTRATIONS FOR 2021¹

¹Federal and State Standard = 0.070 ppm (70 ppb)

² Sampled Q1 only

NO ₂ (ppb)												
Station	1st	Date	Time	2nd	Date	Time	3rd	Date	Time	4th	Date	Time
Las Flores Canyon	62	10/12/2021	13:00	14	2/24/2021	10:00	14	11/23/2021	13:00	9	12/13/2021	15:00
Lompoc H Street	27	2/25/2021	6:00	24	12/1/2021	6:00	22	2/18/2021	6:00	22	11/22/2021	19:00
Santa Maria ²	25	1/15/2021	19:00	23	1/25/2021	8:00	20	1/19/2021	8:00	19	1/14/2021	20:00
Carpinteria	11	12/1/2021	15:00	10	12/6/2021	16:00	9	1/18/2021	16:00	9	10/29/2021	17:00
Lompoc North	5	10/29/2021	17:00	5	3/31/2021	6:00	5	10/28/2021	19:00	4	10/1/2021	7:00
Paradise	3	3/3/2021	15:00	3	3/1/2021	18:00	3	10/5/2021	7:00	3	12/23/2021	15:00

TABLE 3-3: FOUR HIGHEST 1-HOUR NO₂ CONCENTRATIONS FOR 2021¹

¹ Federal Standard = 0.100 ppm (100 ppb); State Standard = 0.18 ppm (180 ppb) 2 Sampled Q1 only

TABLE 3-4: FOUR HIGHEST 1-HOUR SO₂ CONCENTRATIONS FOR 2021¹

	SO ₂ (ppb)											
Station	1st	Date	Time	2nd	Date	Time	3rd	Date	Time	4th	Date	Time
Las Flores Canyon	11	10/12/2021	13:00	2	3/7/2021	3:00	2	4/1/2021	9:00	2	4/7/2021	3:00
Lompoc North	5	12/16/2021	3:00	4	12/15/2021	3:00	4	12/12/2021	3:00	4	12/17/2021	3:00
West Campus	3	7/13/2021	2:00	3	7/15/2021	2:00	3	7/14/2021	2:00	3	7/16/2021	2:00
Lompoc H Street	2	1/16/2021	3:00	2	1/17/2021	3:00	2	6/18/2021	3:00	2	6/28/2021	3:00

¹ Federal Standard = 0.075 ppm (75 ppb); State Standard = 0.25 ppm (250 ppb)

TABLE 3-5: FOUR HIGHEST 1-HOUR CO CONCENTRATIONS FOR 2021¹

	CO (ppm)											
Station 1st Date Time 2nd Date Time 3rd Date Time 4th Date T								Time				
Las Flores Canyon	4.5	10/12/2021	13:00	0.8	4/1/2021	9:00	0.5	2/24/2021	10:00	0.4	1/3/2021	10:00
Lompoc H Street	1.9	1/4/2021	9:00	1.5	1/24/2021	8:00	1.0	4/24/2021	3:00	1.0	12/4/2021	21:00
Santa Maria ²	0.75	1/15/2021	19:00	0.61	1/13/2021	8:00	0.527	1/29/2021	20:00	cool	1/16/2021	19:00

¹ Federal Standard = 35 ppm; State Standard = 20 ppm

² Sampled Q1 only

4 PARTICULATE MATTER SUMMARY

Five stations collected PM₁₀ data in 2021. The five stations used a PM₁₀ Beta Attenuation Monitor (BAM) sampler that operated 24 hours a day and provided real-time hourly values for ambient PM₁₀ concentrations. Four stations collected PM_{2.5} data using a PM_{2.5} BAM, collecting continuous hourly data. The hourly concentrations are used to calculate daily 24-hour concentrations for comparison with the air quality standards.

A summary of the highest particulate matter values in Santa Barbara County during 2021 is provided in Tables 4-1 through 4-4. The summaries contain the four highest 24-hour PM concentrations, and the annual averages for each station. The state air quality standards are based on data collected at local conditions (i.e., pressure and temperature measured at the time of the sampling), while the federal standards are based on data corrected to standard conditions (i.e., pressure and temperature as level).

TABLE 4-1: FOUR HIGHEST 24-HOUR AVERAGE LOCAL PM₁₀ CONCENTRATIONS FOR 2021¹

	Particulate Matter Less Than 10 Microns (µg/m ³)								
Station	1st	Date	2nd	Date	3rd	Date	4th	Date	
Lompoc	76	10/11/2021	47	2/26/2021	45	6/16/2021	44	5/8/2021	
Santa Barbara	61	10/11/2021	49	2/25/2021	48	5/20/2021	47	6/15/2021	
LFC1	51	10/11/2021	46	2/25/2021	45	9/29/2021	41	1/19/2021	
Goleta	49	1/19/2021	48	2/25/2021	48	10/11/2021	44	5/3/2021	
Santa Maria ²	42	2/16/2021	37	1/19/2021	37	1/8/2021	36	2/3/2021	

¹ State 24-Hour Standard = 50 μ g/m³ at local conditions

² Sampled Q1 only

TABLE 4-2: FOUR HIGHEST 24-HOUR AVERAGE STANDARD PM10 CONCENTRATIONS FOR 2021¹

	Particulate Matter Less Than 10 Microns (µg/m³)									
Station	1st	Date	2nd	Date	3rd	Date	4th	Date		
Lompoc	73	10/11/2022	44	2/26/2021	43	6/16/2021	41	5/8/2021		
Santa Barbara	59	10/11/2021	48	10/13/2021	47	5/20/2021	46	6/15/2021		
Santa Maria ²	54	2/26/2021	44	2/27/2021	40	2/25/2021	39	2/16/2021		
LFC1	48	10/11/2021	43	2/25/2021	43	9/29/2021	38	1/19/2021		
Goleta	47	1/19/2021	46	10/11/2021	45	2/25/2021	42	6/16/2021		

¹Federal 24-Hour Standard = $150 \mu g/m^3$ at standard conditions ²Sampled Q1 only

TABLE 4-3: FOUR HIGHEST 24-HOUR AVERAGE PM2.5 CONCENTRATIONS FOR 2021¹

	Particulate Matter Less Than 2.5 Microns (µg/m ³)								
Station	1st	Date	2nd	Date	3rd	Date	4th	Date	
Santa Barbara	20	10/13/2021	18	10/14/2021	18	4/10/2021	18	4/12/2021	
Goleta	19	10/14/2021	18	10/12/2021	17	12/7/2021	17	11/8/2021	
Lompoc	18	9/5/2021	17	9/4/2021	16	9/3/2021	15	5/9/2021	
Santa Maria ²	12	2/27/2021	11	2/26/2021	10	2/16/2021	10	2/24/2021	

¹Federal 24-Hour Standard = $35 \mu g/m^3$ at local conditions

² Sampled Q1 only

TABLE 4-4: ANNUAL ARITHMETIC MEANPM CONCENTRATIONS FOR 2021

Particulate Ma	tter (µg/m³)	
Station	PM ₁₀	PM _{2.5}
Santa Barbara	19.8	6.7
Goleta	18.8	5.7
Lompoc H Street	16.8	5.8
Las Flores Canyon	14.3	
Santa Maria ³	-	-

 1 State PM $_{10}$ Annual Arithmetic Mean Standard = 20 $\mu g/m^3$ at local conditions

 2 Federal and State PM_{2.5} Annual Arithmetic Mean Standard = 12 $\mu g/m^3$ at local conditions 3 Sampled Q1 only

5 AIR QUALITY TRENDS

In 2021, Santa Barbara County generally had good air quality. While the impact of wildfire smoke was still present, historical data still show the progress that has been made. Over time, voluntary and regulatory measures, technology improvements, and better community- and transportation planning have led to tremendous improvements in Santa Barbara County's air quality. This section provides information in several different formats to demonstrate the long-term trends for Santa Barbara County's air quality.

Number of Days Exceeding Ozone Standards

Figure 5-1 indicates the number of days that the county exceeded the federal and state ozone standard since 2001. The downward trend from 34 days in 2001 to one day in 2021 demonstrates that the combined strategy of stationary and mobile source reductions of ozone precursor pollutants, in the form of both regulatory and voluntary measures, has achieved dramatic improvements in ozone levels. Figure 5-1 also includes information on population growth.

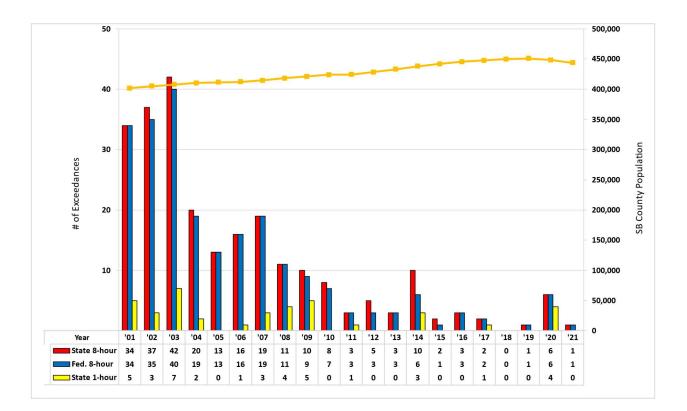


FIGURE 5-1: OZONE STANDARD EXCEEDANCE DAYS

Number of Days Exceeding PM Standards

Prior to 2006, particulate monitoring in Santa Barbara County followed a six-day sampling schedule as set by federal and state agencies. Samples were taken over a 24-hour sampling period and required lab analysis to calculate the pollutant concentration. Our current network monitors PM data every day and every hour. The transition from six-day sampling to continuous sampling was phased in over a four-year period. The Santa Barbara and Santa Maria stations have continuously sampled both PM₁₀ and PM_{2.5} starting in 2006. The Lompoc station began continuous sampling for PM_{2.5} in 2007, and PM₁₀ was added in 2009. In 2010, continuous sampling for both PM₁₀ and PM_{2.5} was added at the Goleta station.

Figure 5-2 indicates the number of days that the county exceeded the state and federal PM standards since 2006. Data prior to 2006 is not provided because it does not compare well to the post-2006 PM data due to the difference in methods described above. Figure 5-2 shows that the county's particulate levels vary year-to-year, and the number of days that the county exceeds the air quality standards is influenced by natural events such as wildfires and droughts. Specifically, the Zaca Fire in 2007 burned for most of July and August and greatly affected particulate levels both locally and throughout the state. In 2008 and 2009, the Tea, Gap, and Jesusita Fires caused high particulate levels while burning. More recently, the Thomas Fire and several other California wildfires caused high particulate levels. While fires are burning and smoke is present, PM_{2.5} levels are generally high and may cause health concerns. After fires are extinguished, residual ash can be re-entrained by wind and cause high PM₁₀ levels. During California's prolonged droughts that occurred over the last 15 years, dry conditions likely contributed to many of these PM exceedances.

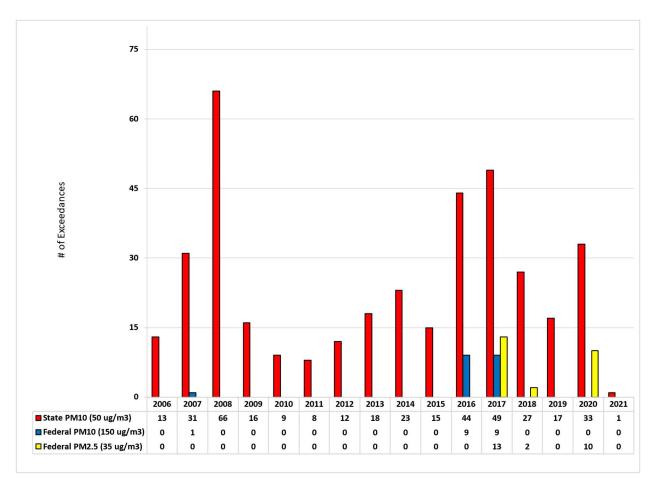


FIGURE 5-2: PARTICULATE MATTER EXCEEDANCES

Air Quality Index Trends

The Air Quality Index, or AQI, is a standardized value that was developed by the EPA to communicate to the public on whether air pollution levels are healthy or unhealthy. Ground-level ozone and particulate matter are the two pollutants that pose the greatest threat to public health; the AQI value is based on the pollutant with the highest measured levels at that time. The AQI levels range from "Good," represented by a green color, to "Hazardous," represented by a maroon color. More information on the AQI can be found on the District's website at <u>www.ourair.org/todays-air-quality</u>.

Figure 5-3 shows the numbers of days each year that Santa Barbara County air quality was at each of the different AQI levels. As demonstrated in this figure, the majority of days (300 days, or 82.2%) in Santa Barbara County were green, or Good air quality, during 2021. The remainder of the days were Moderate (64 days, 17.5%), with one day being Unhealthy for Sensitive Groups (0.3%). A Moderate AQI means that there is a moderate health concern for individuals that are unusually sensitive to air pollution. The AQI trends in Figure 5-3 represent the highest AQI readings from all monitoring stations in the county each day.



FIGURE 5-3: AIR QUALITY INDEX TRENDS

Detailed Trends for Individual Pollutants

Figures 5-4 through 5-9 provide a more detailed picture of trends for each pollutant over time, and how the measured values for each pollutant have changed. These charts show trends for the highest measured values, using data from all monitoring stations in the county. Different types of values are referenced for each of the pollutants (e.g., 2nd and 4th maximum values for ozone), because each of the air quality standards define which values are relevant for that pollutant standard.

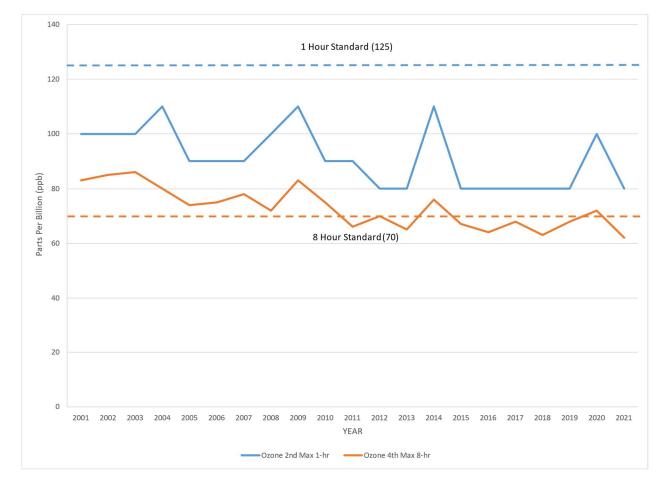


FIGURE 5-4: MEASURED OZONE LEVELS (PARTS PER BILLION)


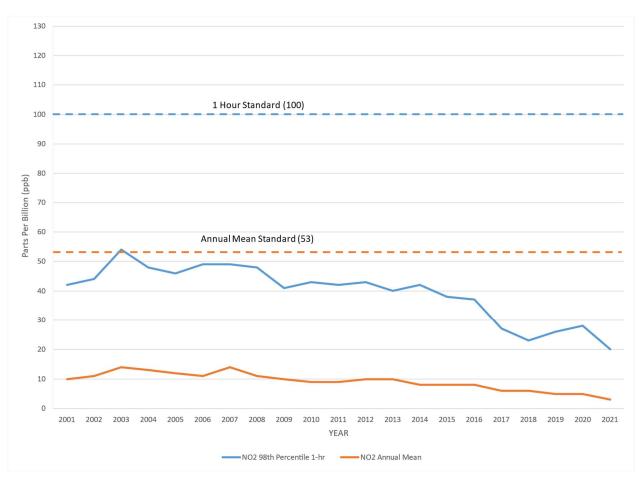


FIGURE 5-5: MEASURED NITROGEN DIOXIDE LEVELS (PARTS PER BILLION)



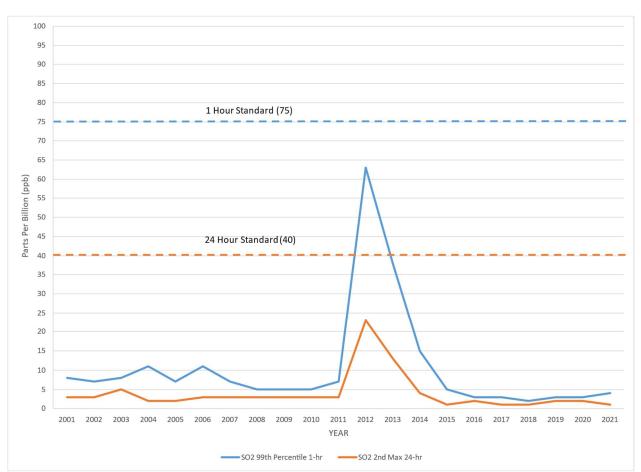

¹High SO₂ levels recorded in 2012 were related to a release at the stationary source facility at Las Flores Canyon.

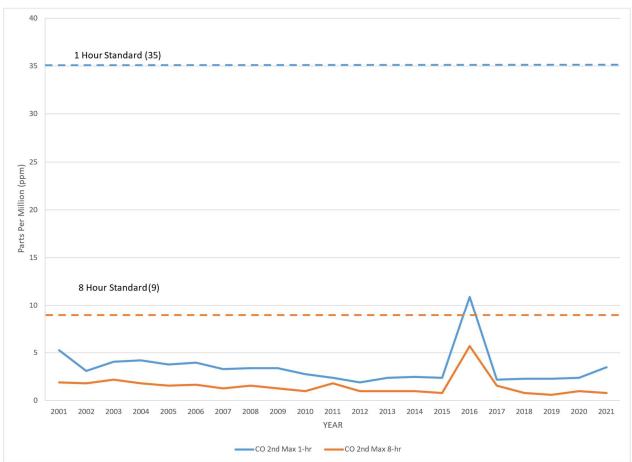


FIGURE 5-7: MEASURED CARBON MONOXIDE LEVELS (PARTS PER MILLION)¹

¹ High CO values recorded in 2016 were the result of the Sherpa wildfire burning near the Las Flores Canyon monitoring station.

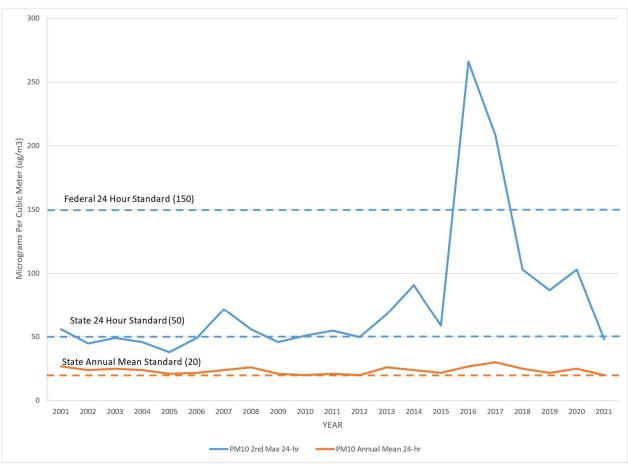


FIGURE 5-8: MEASURED PM₁₀ LEVELS (µg/m³)^{1,2}

 1 Prior to 2006, samples were collected every 6 days. By 2010 all samples were continuous. 2 High PM_{10} values recorded in 2016 and 2017 were the result of wildfires.

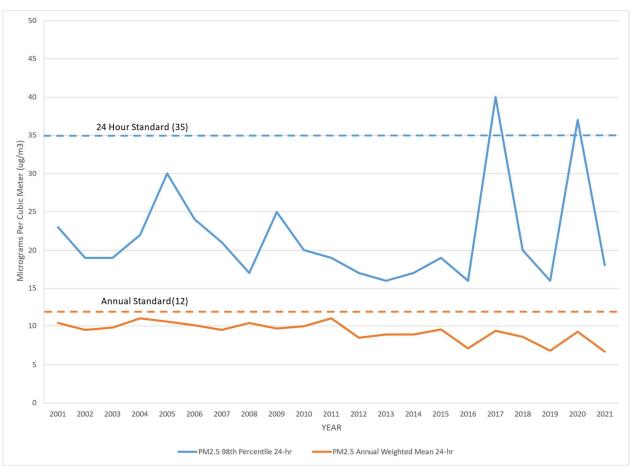


FIGURE 5-9: MEASURED PM_{2.5} LEVELS (µg/m³)^{1,2}

 1 Prior to 2006, samples were collected every 6 days. By 2010 all samples were continuous. 2 High PM_{2.5} values recorded in 2017 and 2020 were the result of wildfires.

Pollutant Pollutant TimeAveraging Concentrational Concentrational Method 4National StandardsMethod 702cone (Oy)1 Hour0.09 ppm (180 µpm') 0 HourUltravidet Photometry 0.070 ppm (137 µpm')Same as Primary StandardUltravidet PhotometryRespirable Particulate Matter (PH10)24 Hour50 µpm' Annual Annual Annual 12 µpm'Gravimetric or Beta Altenuation150 µpm' Same as Primary Standard Interlial Separation and Gravimetric Fine Particulate Matter (PH10)24 Hour 35 µpm'Same as Primary Standard Interlial Separation and Gravimetric Matter (PH10) Matter (PH10)20 µpm (23 µpm')Gravimetric or Beta Altenuation35 ppm (40 µpm') Non-Dispersive Intered PhotometryMatter (PH10) Minneto Mana0.030 ppm (100 µpm')Non-Dispersive Primary StandardNon-Dispersive Intered PhotometryNon-Dispersive (NO)*6 Hour0.030 ppm (100 µpm')Non-Dispersive (NDN)	Ambient Air Quality Standards							
Image: concentration 3Method 4Primary 35Secondary 36Method 7 $D_{CODE}(O_3)^3$ 1 Hour0.09 ppm (180 µg/m)Ultraviolet Photometry $$ $0.070 ppm (137 µg/m)0.070 ppm (137 µg/m)$	Pollutant		California Standards		National Standards			
Ozone (O ₃)*Image: Difference of the problem (137 µg/m)Ultravidet protometryUltravidet protometryDifference of the protometryDifferen			Concentration ³	Method ⁴	Primary ^{3,5}	Secondary ^{3,6}	Method 7	
Respirable Particulate Matter (PM10)24 Hour50 µg/m³ 50 µg/m³Finder (Mather Primary Standard Annual Arithmetic Mean20 µg/m³ 20 µg/m³Finder (Mather Primary Standard mather (PM10)Intertial Separation and Gravimetic or Bate Attenuation150 µg/m³ (Mather (PM10)Same as Primary Standard mather (PM10)Intertial Separation and Gravimetic or Annual Arithmetic Mean12 µg/m³ (Mather (PM2,5)*Intertial Separation and Gravimetic Annual (PM2,5)*Intertial Separation and Gravimetic Bate Attenuation15 µg/m³ (Mather (PM2,5)*Intertial Separation and Gravimetic Annual (PM2,5)*Intertial Separation and Gravimetic Annual (SO)Intertial Separation and Gravimetic Annual (RM0,7)*Intertial Separation and Gravimetic Annual (NOIR)*Intertial Separation and Gravimetic (NOIR)*Intertial Separation and Gravimetic (NOIR)*Intertial Separation and Gravimetic (NOIR)*Intertial Separation (NOIR)*Intertial Separation (NOIR)*Intertial Separation (NOIR)*Intertial Separation (NOIR)*Intertial Separation (NOIR)*Intertial Separation (NOIR)*Intertial Separation <br< th=""><th rowspan="2">Ozone (O₃)⁸</th><th>1 Hour</th><th>0.09 ppm (180 µg/m³)</th><th rowspan="2"></th><th>-</th><th></th><th rowspan="2"></th></br<>	Ozone (O ₃) ⁸	1 Hour	0.09 ppm (180 µg/m ³)		-			
Particulate Matter (PM10) Annual Anthmetic Mean 20 µg/m ³ Gravimetic or Beta Attenuation 100 Same as Primary Standard Initial Gravimetric Analysis Particulate Matter (PM10, 5)* 24 Hour — — 35 µg/m ³ Primary Standard Inertial Separation and Gravimetric Analysis Particulate Matter (PM12, 5)* 24 Hour — — 35 µg/m ³ Primary Standard Inertial Separation and Gravimetric Analysis Carbon Monoxide (CO) 1 Hour 20 µg/m (23 µg/m ³) Gravimetric or Beta Attenuation 35 ppm (40 µg/m ³) — Mor-Dispersive Infrared Photometry (NDIR) 36 ppm (40 µg/m ³) — Mor-Dispersive Infrared Photometry (NDIR) Mor-Dispersive Infrared Photometry (NDIR) 36 ppm (10 µg/m ³) — _ Mor-Dispersive Infrared Photometry (NDIR) 36 ppm (40 µg/m ³) — _		8 Hour	0.070 ppm (137 µg/m ³)		0.070 ppm (137 μg/m ³)	Primary Standard		
Matter (PM10) Annual Attimetic Mean 20 µg/m ³ Beta Attenuation — Primary Standard Primary Standard Analysis Particulate Matter (PM2.5) ⁹ 24 Hour — — 35 µg/m ³ Same as Primary Standard Inertial Separation and Gravimetric Analysis Carbon Monoxide (CO) 1 Hour 20 ppm (23 mg/m ³) Gravimetric or Beta Attenuation 35 ppm (40 mg/m ³) — Non-Dispersive Infrared Photometry (NDIR) 35 ppm (40 mg/m ³) — Mon-Dispersive Infrared Photometry (NDIR) 35 ppm (40 mg/m ³) — Mon-Dispersive Infrared Photometry (NDIR) 36 ppm (10 mg/m ³) — Mon-Dispersive Infrared Photometry (NDIR) 9 ppm (10 mg/m ³) — Mon-Dispersive Infrared Photometry (NDIR) 9 ppm (10 mg/m ³) — Mon-Dispersive Infrared Photometry (NDIR) 9 ppm (10 mg/m ³) — — Gas Phase Chemiluminescence 100 ppb (188 µg/m ³) — _ Gas Phase Chemiluminescence _	Particulate	24 Hour	50 µg/m ³		150 µg/m ³			
$ \begin{array}{ c c c c } \hline Primary Standard Matter (PM2.5) & 24 \ Hour & Annual Annual Attimute (Harden Standard (PM2.5)) & 11 \ Hour & 20 \ ppm (23 \ mg/m^3) & 15 \ \mug/m^3 & 14 \ \mug/m^3 & 14 \ Hour & 20 \ ppm (23 \ mg/m^3) & 15 \ \mug/m^3 & 15 \ \mug/m^3 & 15 \ \mug/m^3 & 14 \ \mug/m^3 & 14 \ hour & 9.0 \ ppm (10 \ mg/m^3) & 16 \ \mug/m^3 &$			20 µg/m ³		-	Primary Standard		
Matter (PM 2.5) ⁹ Annual Arithmetic Mean 12 µg/m ³ Gravimetric or Beta Attenuation 12 µg/m ³ 15 µg/m ³ Analysis Carbon Monoxide (CO) 1 Hour 20 ppm (23 mg/m ³) 35 ppm (40 mg/m ³)	Particulate Matter	24 Hour	-	-	35 μg/m ³		and Gravimetric	
Carbon Monoxide (CO) Corput (Congent) Non-Dispersive Infrared Photometry (NDR) Opp (Congent) Non-Dispersive Infrared Photometry (NDR) Non-Dispersive Infrared Photometry (NDR) Non-Dispersive Infrared Photometry (NDR) Non-Dispersive Infrared Photometry (NDR) Non-Dispersive Infrared Photometry (NDR) Non-Dispersive Infrared Photometry (NDR) Nitrogen Dioxide (NO ₂) ¹⁰ 4 Hour 0.18 ppm (33 µg/m ³) Gas Phase Chemiluminescence 100 ppb (188 µg/m ³) — Gas Phase Chemiluminescence Cost ppm (100 µg/m ³) Same as primary Standard Gas Phase Chemiluminescence Cost ppm (100 µg/m ³) Same as primary Standard Gas Phase Chemiluminescence Cost ppm (100 µg/m ³) Same as primary Standard Gas Phase Chemiluminescence Cost ppm (100 µg/m ³) — Gas Phase Chemiluminescence Cost ppm (100 µg/m ³) — Gas Phase Chemiluminescence Cost ppm (100 µg/m ³) — Gas Phase Chemiluminescence Cost ppm (100 µg/m ³) — Gas Phase Chemiluminescence Cost ppm (100 µg/m ³) — Gas Phase Chemiluminescence Cost ppm (100 µg/m ³) — — UItraviolet Flourescence — — — — — — — — — — Mehod) — </th <td></td> <td>12 µg/m³</td> <td></td> <td>12.0 µg/m³</td> <td>15 µg/m³</td>			12 µg/m ³		12.0 µg/m ³	15 µg/m ³		
Monoxide (CO) 8 Hour (Lake Tahoe) 9.0 pm (10 mg/m ³) Infrared Photometry (NDIR) 9 pm (10 mg/m ³) — Infrared Photometry (NDIR) Nitrogen Dioxide (NO ₂) ¹⁰ 1 Hour 0.18 pm (33 µg/m ³) Gas Phase Chemiluminescence 100 ppb (188 µg/m ³) — Gas Phase O.053 pm (100 µg/m ³) Gas Phase Primary Standard Sulfur Dioxide (SO ₂) 1 Hour 0.25 pm (655 µg/m ³)	Monoxide	1 Hour	20 ppm (23 mg/m ³)	Infrared Photometry	35 ppm (40 mg/m ³)	_	Infrared Photometry	
$ \begin{array}{ c c c c c c c c c c c c } \hline \begin{tabular}{ c c c c c c c c c c c c c c c c c c c$		8 Hour	9.0 ppm (10 mg/m ³)		9 ppm (10 mg/m ³)	-		
Dioxide (NO_2)10Annual Arithmetic Mean0.030 ppm (57 µg/m)3Gas Phase ChemiluminescenceChemiluminescenceGas Phase ChemiluminescenceGas Phase ChemiluminescenceSulfur Dioxide (SO_2)1 Hour0.25 ppm (655 µg/m)3 2.25 ppm (655 µg/m)3 75 ppm (105 µg/m)375 ppb (196 µg/m)3Uitraviolet Flourescence;Uitraviolet Spectrophotometry (for certain areas)Uitraviolet Flourescence;Uitraviolet Flourescence;Uitraviolet Spectrophotometry (Paraosanline Method)Lead12.1330 Day Average1.5 µg/m31.5 µg/m3 (for certain areas)30 Day Average1.5 µg/m3			6 ppm (7 mg/m ³)		-	-		
(NO2)19Annual Arithmetic Mean0.030 ppm (57 μg/m²)Chemiluminescence0.053 ppm (100 μg/m²)Same as Primary StandardChemiluminescenceSulfur Dioxide (SO2)1 Hour0.25 ppm (655 μg/m²) </th <th rowspan="2">Dioxide</th> <th>1 Hour</th> <th>0.18 ppm (339 µg/m³)</th> <th rowspan="2"></th> <th>100 ppb (188 µg/m³)</th> <th>-</th> <th rowspan="2"></th>	Dioxide	1 Hour	0.18 ppm (339 µg/m ³)		100 ppb (188 µg/m ³)	-		
Sulfur Dioxide (SO ₂) 3 Hour — Ultraviolet Fluorescence — 0.5 ppm (1300 µg/m ³) Ultraviolet Fluorescence; Spectrophotometry (for certain areas) — Ultraviolet Fluorescence; Spectrophotometry (for certain areas) — Ultraviolet Fluorescence; Spectrophotometry (for certain areas) — Ultraviolet Fluorescence; Spectrophotometry (for certain areas) — — Method) Lead ^{12,13} 30 Day Average 1.5 µg/m ³ — — — — — Method) Lead ^{12,13} Calendar Quarter — — — — — — — — Method) Method) Visibility Reducing Particles 8 Hour — Beta Attenuation and Transmittance through Filter Tape No No No No No _ Hydrogen Sulfates 24 Hour 25 µg/m ³ Ion Chromatography Ultraviolet Fluorescence No _ <			0.030 ppm (57 µg/m ³)		0.053 ppm (100 µg/m ³)			
Sulfur Dioxide (SO ₂) 3 Hour — — Introduct (1300 µg/m ³) Flourescence: Spectrophotometry (Pararosanilne Method) 24 Hour 0.04 ppm (105 µg/m ³) — [1300 µg/m ³) Flourescence: Spectrophotometry (Pararosanilne Method) Annual Arithmetic Mean — 0.030 ppm (for certain areas) — — 30 Day Average 1.5 µg/m ³ — — — Galendar Quarter — — — — — Rolling 3-Month Average — Atomic Absorption 1.5 µg/m ³ (for certain areas) ¹² Same as Primary Standard High Volume Sampler and Atomic Absorption Visibility Reducing Particles 8 Hour 25 µg/m ³ Ion Chromatography Fluorescence No Hydrogen Sulfide 1 Hour 0.03 ppm (42 µg/m ³) Ultraviolet Fluorescence Sam Standards		1 Hour	0.25 ppm (655 µg/m ³)		75 ppb (196 μg/m ³)	-	Flourescence; Spectrophotometry (Pararosaniline	
(SO2)24 Hour0.04 ppm (105 μg/m³)Fluorescence0.14 ppm (for certain areas)—(Pararosaniline Method)Annual Arithmetic Mean——0.030 ppm (for certain areas)—(Pararosaniline Method)Lead12.1330 Day Average1.5 µg/m³————Calendar Quarter——Atomic Absorption—1.5 µg/m³ (for certain areas) ¹² Same as Primary StandardHigh Volume Same as Primary StandardHigh Volume Same as Primary StandardVisibility Reducing Particles8 Hour25 µg/m³Ion ChromatographyNoNational StandardsHydrogen Sulfide1 Hour0.03 ppm (42 µg/m³)Ultraviolet FluorescenceUltraviolet FluorescenceSame as Primary StandardNational StandardsVinylNinylNoSame as Same as Primary StandardNational		3 Hour	_		_			
Arithmetic Mean—(for certain areas)—30 Day Average1.5 µg/m³[for certain areas)——Lead ^{12,13} Calendar Quarter——1.5 µg/m³Same as Primary StandardHigh Volume Sampler and Atomic AbsorptionRolling 3-Month Average——1.5 µg/m³Same as Primary StandardHigh Volume Sampler and Atomic AbsorptionVisibility Reducing Particles8 HourBeta Attenuation and Transmittance through Filter TapeNoNoSulfates24 Hour25 µg/m³Ion ChromatographyUltraviolet FluorescenceNationalVinyl1 Hour0.03 ppm (42 µg/m³)Ultraviolet FluorescenceStandards		24 Hour	0.04 ppm (105 µg/m ³)			-		
Lead ^{12,13} Calendar Quarter — Atomic Absorption 1.5 μg/m ³ (for certain areas) ¹² Same as Primary Standard High Volume Sampler and Atomic Absorption Visibility Reducing Particles 8 Hour — Beta Attenuation and Transmittance through Filter Tape No No Sulfates 24 Hour 25 μg/m ³ Ion Chromatography National National Hydrogen Sulfide 1 Hour 0.03 ppm (42 μg/m ³) Ultraviolet Fluorescence Standards			-			-		
Lead ^{12,13} Calendar Quarter — Atomic Absorption Ito spann (for certain areas) ¹² Same as Primary Standard Sampler and Atomic Absorption Visibility Reducing Particles 8 Hour — Beta Attenuation and Transmittance through Filter Tape No No Sulfates 24 Hour 25 µg/m ³ Ion Chromatography National National Hydrogen Sulfide 1 Hour 0.03 ppm (42 µg/m ³) Ultraviolet Fluorescence Standards	Lead ^{12,13}	30 Day Average	1.5 µg/m ³	Atomic Absorption	-	-	Sampler and Atomic Absorption	
Roling 3-Month Average — 0.15 μg/m ³ Visibility Reducing Particles 8 Hour Beta Attenuation and Transmittance through Filter Tape Sulfates 24 Hour 25 μg/m ³ In Original Constraints Ion Chromatography Hydrogen Sulfide 1 Hour 0.03 ppm (42 μg/m ³) Vinyl Lun Gas		Calendar Quarter	-					
Reducing Particles 8 Hour Bear Stransmittance through Filter Tape No Sulfates 24 Hour 25 µg/m ³ Ion Chromatography Hydrogen Sulfide 1 Hour 0.03 ppm (42 µg/m ³) Ultraviolet Fluorescence Vinyl 5400 Stransmittance Standards			1			Primary Standard		
Sulfates 24 Hour 25 µg/m ³ Ion Chromatography Hydrogen Sulfide 1 Hour 0.03 ppm (42 µg/m ³) Ultraviolet Fluorescence Standards Vinyl 1 Hour 0.03 ppm (42 µg/m ³) Gas Standards	Reducing	8 Hour		Transmittance	No National			
Sulfide 1 Hour 0.03 ppm (42 µg/m°) Fluorescence Standards Vinyl Standards Gas Gas Standards	Sulfates	24 Hour	25 µg/m ³	Ion Chromatography				
		1 Hour	0.03 ppm (42 µg/m ³)					
		24 Hour	0.01 ppm (26 µg/m ³)					

For more information please call ARB-PIO at (916) 322-2990

California Air Resources Board (5/4/16)

- California standards for ozone, carbon monoxide (except 8-hour Lake Tahoe), sulfur dioxide (1 and 24 hour), nitrogen dioxide, and
 particulate matter (PM10, PM2.5, and visibility reducing particles), are values that are not to be exceeded. All others are not to be
 equaled or exceeded. California ambient air quality standards are listed in the Table of Standards in Section 70200 of Title 17 of the
 California Code of Regulations.
- 2. National standards (other than ozone, particulate matter, and those based on annual arithmetic mean) are not to be exceeded more than once a year. The ozone standard is attained when the fourth highest 8-hour concentration measured at each site in a year, averaged over three years, is equal to or less than the standard. For PM10, the 24 hour standard is attained when the expected number of days per calendar year with a 24-hour average concentration above 150 µg/m³ is equal to or less than one. For PM2.5, the 24 hour standard is attained when 98 percent of the daily concentrations, averaged over three years, are equal to or less than the standard. Contact the U.S. EPA for further clarification and current national policies.
- 3. Concentration expressed first in units in which it was promulgated. Equivalent units given in parentheses are based upon a reference temperature of 25°C and a reference pressure of 760 torr. Most measurements of air quality are to be corrected to a reference temperature of 25°C and a reference pressure of 760 torr; ppm in this table refers to ppm by volume, or micromoles of pollutant per mole of gas.
- Any equivalent measurement method which can be shown to the satisfaction of the ARB to give equivalent results at or near the level of the air quality standard may be used.
- 5. National Primary Standards: The levels of air quality necessary, with an adequate margin of safety to protect the public health.
- National Secondary Standards: The levels of air quality necessary to protect the public welfare from any known or anticipated adverse effects of a pollutant.
- Reference method as described by the U.S. EPA. An "equivalent method" of measurement may be used but must have a "consistent relationship to the reference method" and must be approved by the U.S. EPA.
- 8. On October 1, 2015, the national 8-hour ozone primary and secondary standards were lowered from 0.075 to 0.070 ppm.
- 9. On December 14, 2012, the national annual PM2.5 primary standard was lowered from 15 μg/m³ to 12.0 μg/m³. The existing national 24-hour PM2.5 standards (primary and secondary) were retained at 35 μg/m³, as was the annual secondary standard of 15 μg/m³. The existing 24-hour PM10 standards (primary and secondary) of 150 μg/m³ also were retained. The form of the annual primary and secondary standards is the annual mean, averaged over 3 years.
- 10. To attain the 1-hour national standard, the 3-year average of the annual 98th percentile of the 1-hour daily maximum concentrations at each site must not exceed 100 ppb. Note that the national 1-hour standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the national 1-hour standard to the California standards the units can be converted from ppb to ppm. In this case, the national standard of 100 ppb is identical to 0.100 ppm.
- 11. On June 2, 2010, a new 1-hour SO₂ standard was established and the existing 24-hour and annual primary standards were revoked. To attain the 1-hour national standard, the 3-year average of the annual 99th percentile of the 1-hour daily maximum concentrations at each site must not exceed 75 ppb. The 1971 SO₂ national standards (24-hour and annual) remain in effect until one year after an area is designated for the 2010 standard, except that in areas designated nonattainment for the 1971 standards, the 1971 standards remain in effect until implementation plans to attain or maintain the 2010 standards are approved.

Note that the 1-hour national standard is in units of parts per billion (ppb). California standards are in units of parts per million (ppm). To directly compare the 1-hour national standard to the California standard the units can be converted to ppm. In this case, the national standard of 75 ppb is identical to 0.075 ppm.

- 12. The ARB has identified lead and vinyl chloride as 'toxic air contaminants' with no threshold level of exposure for adverse health effects determined. These actions allow for the implementation of control measures at levels below the ambient concentrations specified for these pollutants.
- 13. The national standard for lead was revised on October 15, 2008 to a rolling 3-month average. The 1978 lead standard (1.5 μg/m³ as a quarterly average) remains in effect until one year after an area is designated for the 2008 standard, except that in areas designated nonattainment for the 1978 standard, the 1978 standard remains in effect until implementation plans to attain or maintain the 2008 standard are approved.
- 14. In 1989, the ARB converted both the general statewide 10-mile visibility standard and the Lake Tahoe 30-mile visibility standard to instrumental equivalents, which are "extinction of 0.23 per kilometer" and "extinction of 0.07 per kilometer" for the statewide and Lake Tahoe Air Basin standards, respectively.

For more information please call ARB-PIO at (916) 322-2990

California Air Resources Board (5/4/16)